



ROHS
Compliant






3D VIEW








NOTES

- CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN.
- DIELECTRIC WITHSTANDING: 500V AC MIN.
- DURABILITY: 5000 CYCLES MIN.
- CONNECTOR MATING FORCES: 3~30N.
- CONNECTOR UNMATING FORCES: 3~30NX.
- SALT SPRAY: 24HOUR
- WATERPROOF LEVEL: IP67.
- OPERATING TEMPERATURE: -25°C TO +85°C.

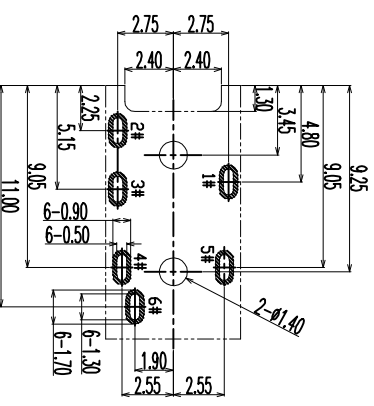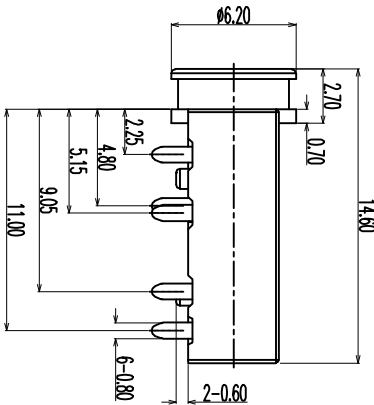

POB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

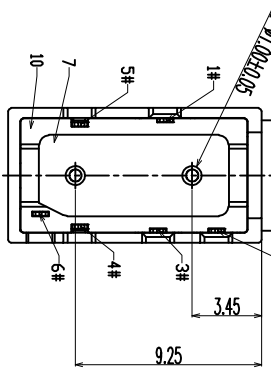

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
10	GLUE	EPOXY	COLOR BLACK	1
9	WATERPROOF RING	SILICONE	COLOR BLACK	1
8	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1
7	COVER	HIGH TEMPERATURE	COLOR BLACK	1
6	TERMINAL 6#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
5	TERMINAL 5#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
4	TERMINAL 4#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
3	TERMINAL 3#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
2	TERMINAL 2#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
1	TERMINAL 1#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1

Not to install the waterproof ring shipment

LZG INDUSTRIAL CO. LTD

PART NAME	WATERPROOF Ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.0±1.1	UNIT:	mm	DRAWING NO.	ZB23003-06DBAP-A	SHEET	1/1
PART NO.	ZB23003-06DBAP-A	OTHERWISE SPECIFIED:	0.000±0.15	0.00±0.5						

F E D C B A