





ROHS Compliant

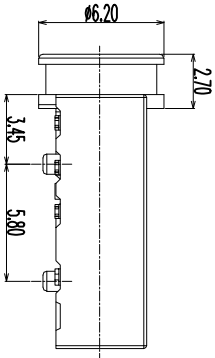


3D VIEW

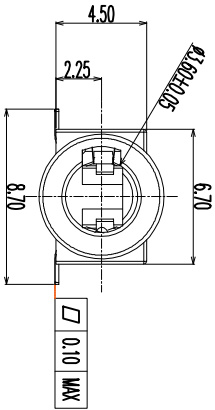

NOTES




- CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN.
- DIELECTRIC WITHSTANDING: 500V AC MIN.
- DURABILITY: 5000 CYCLES MIN.
- CONNECTOR MATING FORCES: 3~30N.
- CONNECTOR UNMATING FORCES: 3~30NX.
- SALT SPRAY: 24HOUR
- WATERPROOF LEVEL: IP67.
- OPERATING TEMPERATURE: -25°C TO +85°C.

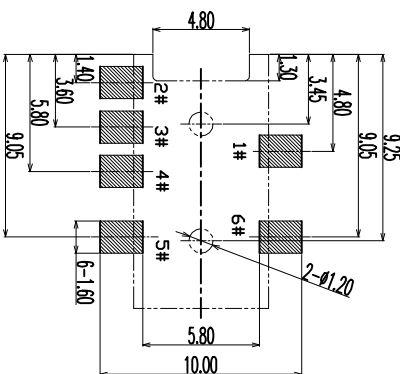

PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

Not to install the waterproof ring shipment

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
10	GLUE	EPOXY	COLOR BLACK	1
9	WATERPROOF RING	SILICONE	COLOR BLACK	1
8	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1
7	COVER	HIGH TEMPERATURE	COLOR BLACK	1
6	TERMINAL 6#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
5	TERMINAL 5#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
4	TERMINAL 4#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
3	TERMINAL 3#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
2	TERMINAL 2#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1
1	TERMINAL 1#	STAINLESS STEEL	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	1

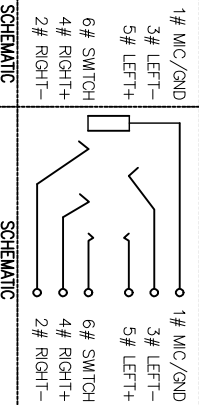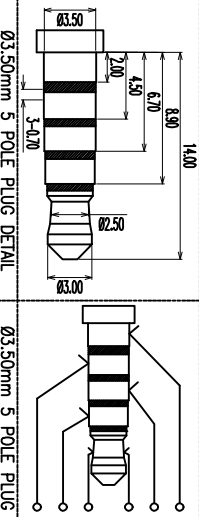

BLACK WATERPROOF RING

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	WATERPROOF 03.5 PHONE JACK			4



LZG INDUSTRIAL CO., LTD

PART NAME	WATERPROOF 03.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	UNIT:	mm	DRAWING NO.	ZB23015-06SBAP-A
PART NO.	ZB23015-06SBAP-A	OTHERWISE SPECIFIED:	0.000±0.10	UNIT:	mm	APPROVAL:	林生材
			0.0±0.1			DATE:	2020.02.18
			0.00±0.5			DATE:	2020.02.18
						DWG. NO.	
						SHEET	1/1

F E D C B A