

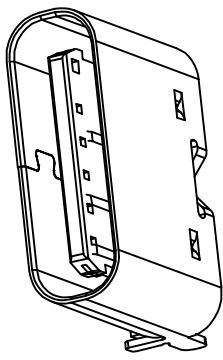
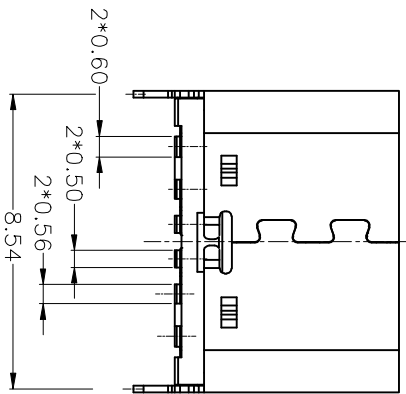
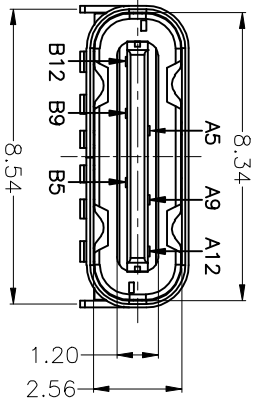

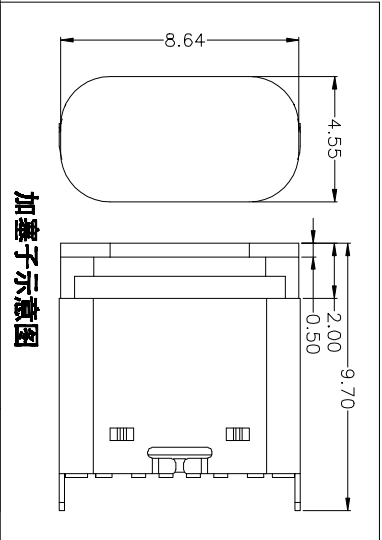


RoHS
Compliant




3D VIEW

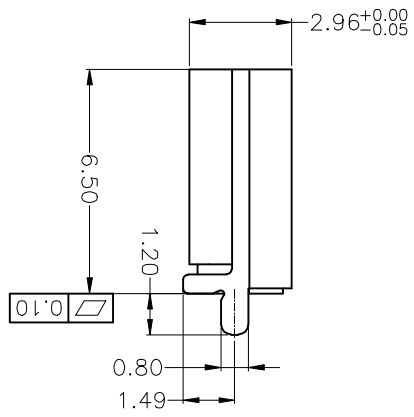

加塞子示意图

- SPECIFICATIONS:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10000 CYCLES

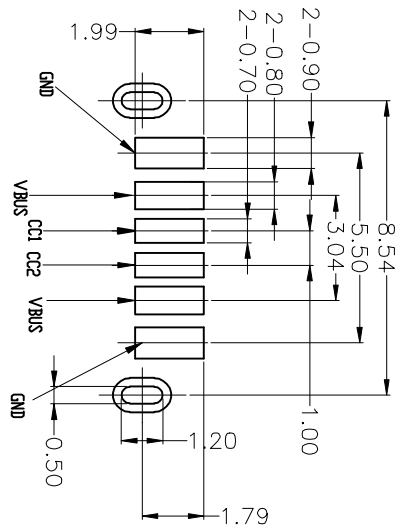

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
1	HOUSING	HIGH TEMPERATURE PLASTIC	COLOR BLACK	1
2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	6
3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1
4	FRONT SHELL	STAINLESS STEEL	CLEAN	1
5	COVER	HIGH TEMPERATURE PLASTIC	COLOR BLACK	1

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2

ZONE	EC.N. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生材	2020.02.18

LZG INDUSTRIAL CO., LTD

PART NAME: TYPE C 6 PIN
PART NO.: ZB48009-06SBAP-A

TOLERANCE UNLESS 0.0±0.3
OTHERWISE SPECIFIED: 0.00±0.2

UNIT: mm

DRAWING NO.: ZB48009-06SBAP-A

LZG

DRAWING: 林生材
CHECK: 李宏鑫

DATE: 2020.02.18
DATE: 2020.02.18

SCALE: 1:1
MATERIAL: *

SHEET: 1/1