






ZONE	EC N. NO.	DESCRIPTION	DRAWING	DATE
A	INITIAL	林生财	2020.02.18	






- SPECIFICATIONS:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY:10,000 CYCLES
 - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.



3D VIEW

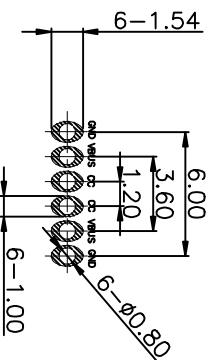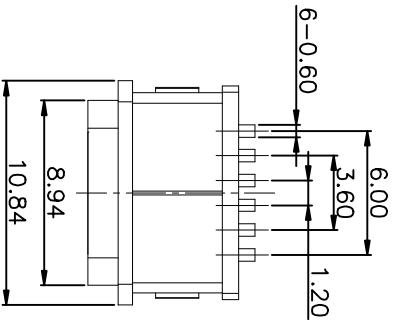

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE:±0.05)

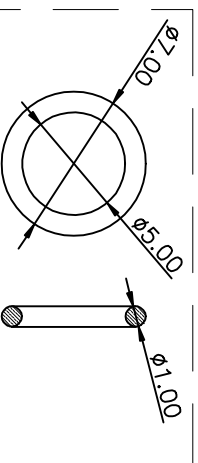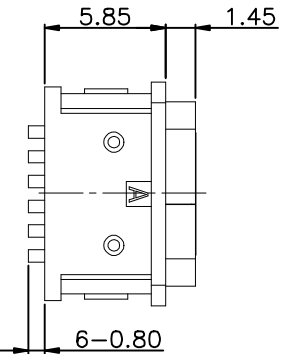

注：防水圈是圆形截面，直径为1.0mm的硅胶圈，防水圈挤压量，由1.0mm挤压到0.5mm ~ 0.6mm, 防水效果好

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	SHELL 1	SUS301	NI PLATING T=0.25mm	1
3	HOUSING 2	PA10T	COLOR BLACK	1
2	CONTACT	PHOSPHOR BRONZE	Au/Ni PLATING T=0.2mm	6
1	HOUSING 1	PA10T	COLOR BLACK	1

结构设计注意：
成品使用时，如有洗面奶泡沫、牙膏、洗手液、脏污液体，请在TYPE-C口外面再设计一层外壳，保护TYPE-C表面金手指不会被脏污覆盖。

		LZG INDUSTRIAL CO., LTD		C		B		A	
PART NAME	WATERPROOF TYPE C 6PIN	TOLERANCE UNLESS	0.0±0.5	UNIT:	mm	DRAWING:	林生财	DATE:	2020.02.18
PART NO.	ZB48014-06DBAP-A	OTHERWISE SPECIFIED:	0.00±0.2			CHECK:	李楚鑫	DATE:	2020.02.18
			0.00±0.1			APPROVAL:	林生财	DWG. NO.:	
						DRAWING NO.:	ZB48014-06DBAP-A	SHEET	1/1